

**Base Camera Link  
ExpressCard/34 Frame Grabber**

PIXCI® ECB1-34 ExpressCard frame grabber with SDR (mini) Camera Link connector measures 99mm L x 34mm W. Trigger input and strobe output cables, with SMA connectors, are optional.

- **Base Configuration Camera Link Frame Grabber**
- **ExpressCard/34 and /54 Compatible**
- **250 Megabyte/sec Burst Transfers**
- **Line Scan or Area Scan**
- **Full Video Rate Sequence Capture**
- **64-Bit Memory Addressing**
- **Camera Integration & Async Reset Control**
- **Integration From Microseconds to Minutes**
- **Images Stored in Notebook Memory or directly to Hard Drive**
- **Compatible with Windows 7, Vista, XP, 2000 & Linux, & 32-bit DOS**
- **RoHS Compliant**

**EPIX, Incorporated**  
381 Lexington Drive  
Buffalo Grove, IL 60089 USA

Specifications subject to change without notice. EPIX and PIXCI are registered trademarks of EPIX, Inc. XCAP is a trademark of EPIX, Inc. EPIX® imaging products are made in the USA.  
© 2010 EPIX, Inc. All Rights Reserved. 22 JAN 2010

The PIXCI® ECB1-34 base Camera Link frame grabber plugs into an ExpressCard/34 or ExpressCard/54 slot in a notebook computer. With 200 megabyte per second sustained data transfer rates, and burst transfers up to 250 megabytes per second, almost all base Camera Link cameras are supported.

The PIXCI® ECB1-34 captures from line scan or area scan cameras operating in either free-run (continuous) or controlled (triggered) mode. Free-run mode provides maximum line or frame rates. Controlled mode uses software for control of each exposure, uses a hardware timing circuit on the PIXCI® ECB1-34 to control exposure, or uses an optional TTL trigger input cable to start exposure. A TTL strobe output cable is available for strobe lighting applications.

The PIXCI® ECB1-34 has software selectable bit packing to decrease the data rate to the ExpressCard bus and to conserve storage space when capturing 10 or 12 bit pixels.

The PIXCI® ECB1-34 requires no hardware setup or adjustment. After installing the XCAP program, insert the PIXCI® ECB1-34 in the ExpressCard slot, connect the camera link cable, power up the camera, and start capturing images.

The PIXCI® ECB1-34 frame grabber, with the XCAP program, offers dedicated camera control dialogs supporting hundreds of the newest, most advanced, highest bandwidth machine vision cameras. For cameras without dedicated software control, the Generic configuration menu allows the user to create and save camera configuration parameters. The included XCAP-Lite imaging program provides camera control and image capture with no software development.

The optional XCAP-Ltd imaging program can capture a 3.5-gigabyte sequence into 4 gigabytes of installed memory on a notebook with 32-bit operating system. An 8-gigabyte sequence can be captured into 10 gigabytes of installed memory on a notebook with a 64-bit operating system.

The optional XCAP-Std imaging program adds video-to-disk capture to the size and speed limits of the hard drive system, and can capture to the limit of available notebook memory. Image processing, measurement, and analysis operations are also provided.

Programmer and image processing libraries are available for application specific software development.

EPIX, Inc. has provided imaging solutions and support to the machine vision market since 1984. EPIX, Inc. sells complete imaging systems with cameras, frame grabbers, and high-performance notebook computers. Contact EPIX, Inc., or an authorized distributor of EPIX® imaging products, for help selecting cameras, frame grabbers, imaging software, optics, or computer imaging systems.

This is the advertisement from:

**TECH BRIEFS**

**Engineering E-Source**


**New Products for OEM Designers & Managers**

Feb 2010



**Best ExpressCard  
Frame Grabber**

The PIXCI® ECB1-34 Camera Link frame grabber for an ExpressCard/34 or ExpressCard/54 slot in a notebook. 200 megabyte per second sustained data transfer rates, and burst transfers up to 250 megabytes per second. Includes XCAP-Lite software for an out of the box imaging solution.

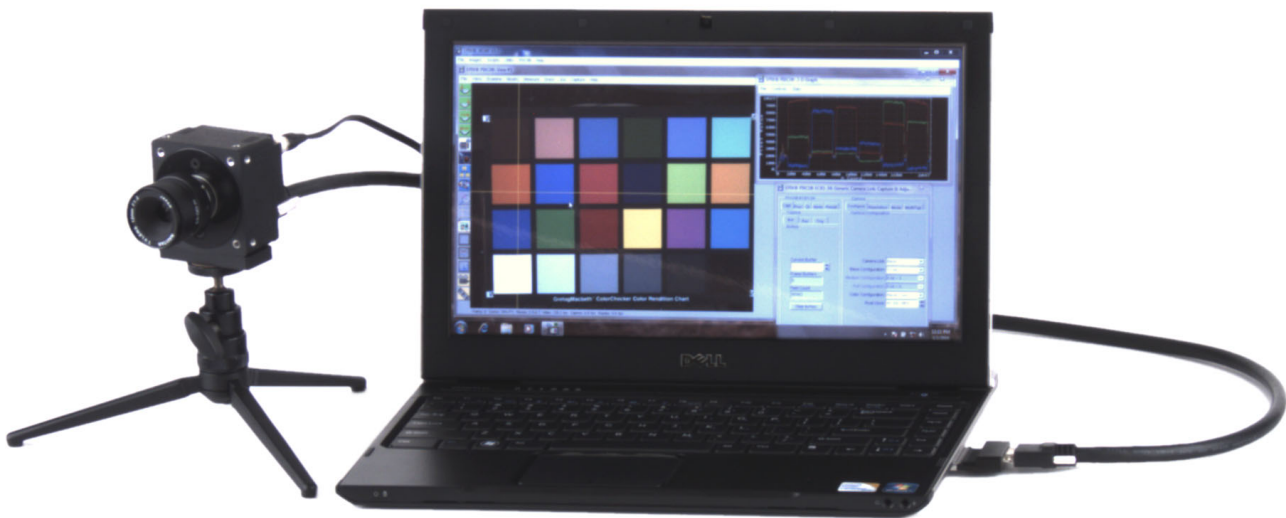

Basler Aviator color camera interfaced to DELL Vostro V13 notebook computer through the PIXCI® ECB1-34 frame grabber from EPIX, Inc. The Aviator avA-1000-120kc camera offers 1024 x 1024 12-bit resolution at up to 120 frames per second. Reduced resolutions offer faster frame rates. The use of bit packing on the PIXCI® ECB1-34 reduces the size of 12-bit image files by 25%. As a result, 33% more images can be captured (at maximum frame rate and while maintaining maximum image quality). The PIXCI® ECB1-34 frame grabber can be used with ALL base Camera link cameras requiring a sustained data transfer rate of 200 megabytes per second or less.

Come see the PIXCI® ECB1-34 and Vostro V13 notebook at the **SPIE Defense, Security, and Sensing Show** in Orlando. Show dates are 6 - 8 April 2010. EPIX will be in Booth #244. Visit <http://spie.org/defense-security-sensing.xml> for show information.